

FARMAR IP65 F 7 LED

LED WATERPROOF LIGHTS / LED prachotesné svietidlá



*Industrial dust
and waterproof led luminaires
for chemically aggressive environment.*

Chemically resistant (NH3).

Protection IP65.

*Wide use, several power
variants.*

*Prachotesné led svietidlo určené
do chemicky náročného prostredia.*

*Odoláva amoniaku, je ideálne
pre hospodárske budovy živočíšnej
výroby.*

Vysoký stupeň krytia IP65.

*Svietidlo s možnosťou použitia rôznych
výkonových variant a prevedení.*

LED



230V
50Hz

CE




IP65

FARMAR IP65 F 7 LED

Type / Typ	Power Výkon (W)	LED luminous flux LED svetelný tok (lm)	Luminous flux Svetelný tok (lm)	Color temperature Farba (K)	CRI	Lifetime L80B10 (Ta=35°C)
FARMAR F7 1x600 mm LED	13 W	1500	1350	4000	>80	>50 000 h
FARMAR F7 1x1200 mm LED	26 W	3000	2700	4000	>80	>50 000 h
FARMAR F7 1x1500 mm LED	33 W	3800	3500	4000	>80	>50 000 h

Dimensions / Rozmery

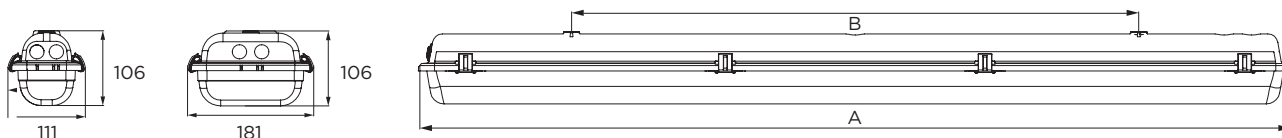

Desing / Vyhotovenie

Housing:

It is made of flame retardant glass-fiber reinforced polyester (on request suitable for 850°C glow wire test too), in light grey (RAL7035) colour.

This material has very good temperature resistance, mechanical stability, furthermore it is a good electrical insulator, it resists the impacts of several chemicals and the impacts of weather conditions. Its stability of size and shape at changing temperatures is excellent.

Diffuser:

For a long-term fight against chemicals we equipped the Farmar F7 IP65 LED with an injection moulded SAN diffuser (styrene acrylonitrile).

Main advantages: strong, resistant, deformable in very slight degree only, transparent, UV-resistant.

Wide use, several power variants.

Teleso svietidla:

Vyrobené z nehorľavého polyesteru vystužené nehorľavými sklennými vláknami (na požiadanie vyrobený pre test žeravenia 850°C), vyhotovený v svetlo sivej farbe RAL7035).

Tento materiál má veľmi dobrú teplotnú odolnosť, mechanickú stabilitu, navyše je to dobrý elektrický izolant, odoláva dopadom rôznych chemikálií a dopadom klimatických podmienok. Materiál dosahuje výbornú stabilitu veľkosti a tvaru pri zmene teplôt


Difúzor:

SAN difúzor (styrén-akrylonitril) odoláva dlhodobému pôsobeniu chemikálií.

Hlavné výhody: silný, odolný, deformovateľný iba vo veľmi miernom stupni, transparentný, odolný voči UV žiareniu.

Svietidla sú konštruované pre čo najľahšie nastavenie, výmenu, údržbu a čistenie.

Farmar F 7 LED 1x13 W

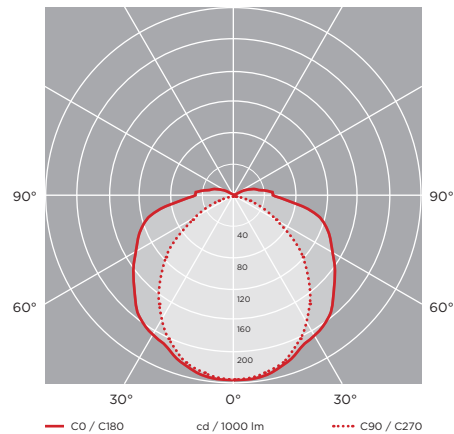

Farmar F 7 LED 1x26 W

