

# MX IP44 LED

## INDUSTRIAL LED LIGHT FITTING



### Product Features:

Base made of PC; mat, opal PC cover  
 Surfaced light with IP 44 protection, with wide usage  
 Mounting height: 2-4m, CRI: Ra>80



Teleso vyrobené z PC; sklenená časť v prevedení  
 matná, opalová  
 Prisadené svietidlo s ochranou IP44  
 Montážna výška: 2-4m, CRI: Ra>80

### Desing:

High protection rating (IP44)  
 Range of light intensity: 1200-3600 lx  
 Ratespeed: 0,6-1,5 m/s

Vysoký stupeň krytia (IP44)  
 Rozsah svetelnej intenzity: 1200-3600 lx  
 Intenzita rýchlosti: 0,6-1,5 m/s

### Dimensions / Rozmery

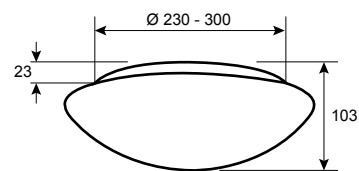

Type / Typ	Power Výkon (W)	Color temperature Farba (K)	Luminous flux Svetelný tok (lm)	Dimensions Rozmery (mm)
MX 230 LED	12W	3000 - 4000	1200	Ø 230
MX 300 LED	18W	3000 - 4000	1800	Ø 300
MX 350 LED	24W	3000 - 4000	2400	Ø 350
MX 450 LED	36W	3000 - 4000	3600	Ø 450

