

DL 800 G LED IP44

LED DOWNLIGHTS 230V



*Recessed, circular soffit lamp,
designed for the interior.*

*LED technology, two independent
circuits and passive cooling.*

*Surface of reflector is adapted,
thanks to micro-pyramidal
polycarbonate diffuser radiates a
subdued brightness.*

*Used screw less terminal block
It gives the possibility of
continuous installation.*

Lamp complies certificate ENEC.

*Zapustené, kruhové podhľadové
svietidlo, určené do interiéru.*

*Technológia LED, dva nezávislé
okruhy a pasívne chladenie.*

*Reflektor je povrchovo upravený,
vďaka mikropyramídovému
polykarbonátovému difúзору
vyžaruje príjemný tlmený jas.*

*Použitá bezskrúťová svorkovnica
dáva možnosť priebežnej
montáži.*


Svietidlo spĺňa certifikát ENEC.




DL 800 G LED IP44

Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Dimensions Rozmery AxB (mm)	Dimensions hole size Rozmery otvoru (mm)	Color temperature Farba (K)
DL 800 G LED	25W	2130	Ø 230x108	Ø 205	3000
DL 800 G LED	32W	2960	Ø 230x108	Ø 205	3000
DL 800 G LED	45W	3910	Ø 230x108	Ø 205	3000
DL 800 G LED	25W	2400	Ø 230x108	Ø 205	4000
DL 800 G LED	32W	3160	Ø 230x108	Ø 205	4000
DL 800 G LED	45W	4220	Ø 230x108	Ø 205	4000


Dimensions / Rozmery

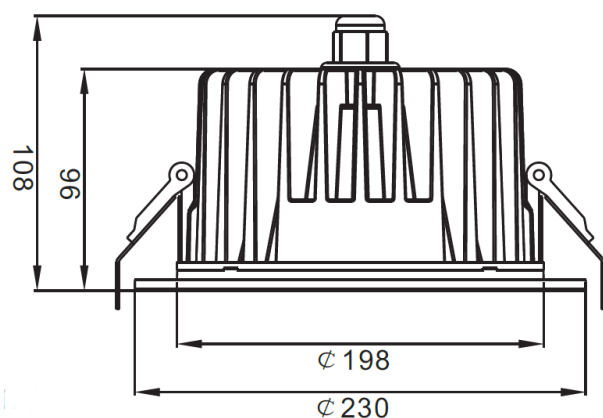


Photometric Diagram /

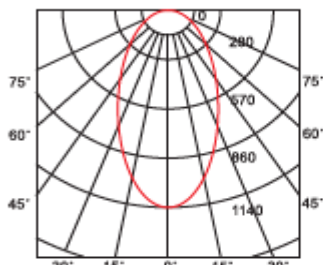

18W 84° 3000K CRI>80

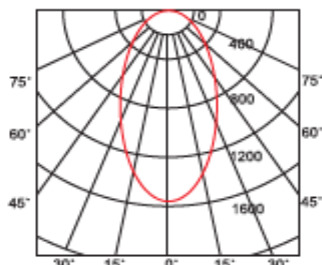

32W 84° 3000K CRI>80

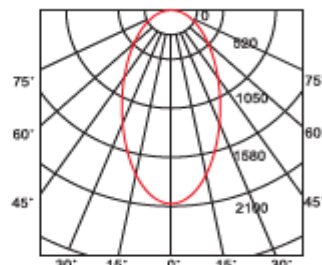

45W 84° 3000K CRI>80