

DL 5200 LED IP54

LED DOWNLIGHTS




| Type / Typ | Power Výkon (W) | Luminous flux Svetelný tok (lm) | Color temperature Farba (K) | Dimensions Rozmery (AxB mm) |
|--------------------------|-----------------------|---------------------------------------|-----------------------------------|-----------------------------------|
| DL 5200 ROUND LED | 18W | 1692 | 4000 | Ø170x68 |
| Váha 2,18 Kg | | | | |


*Teplota okolia : 25°C tolerancia výkonu +/- 5%

** Lumen tolerancia : +/- 7%

Dimensions / Rozmery

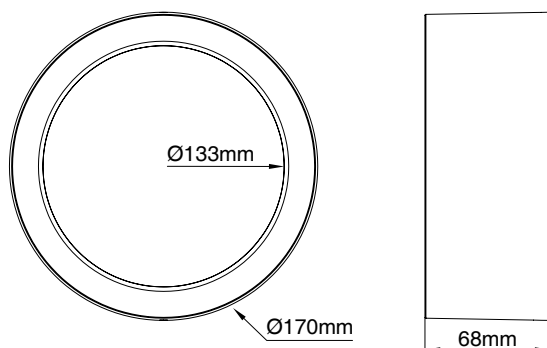


Photometry

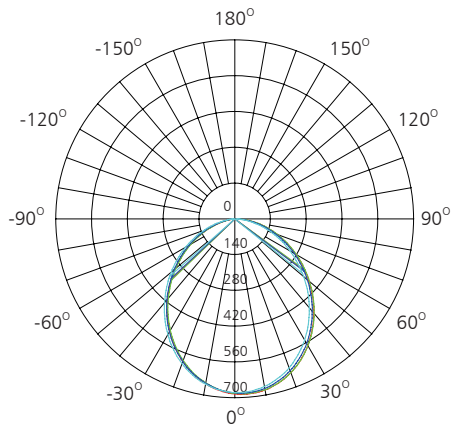

AVERAGE BEAM ANGLE (50%): 99.9DEG

UNIT: cd

- C0/180, 99.9 deg
- C30/210, 99.9 deg
- C60/240, 99.9deg
- C90/270, 99.9 deg

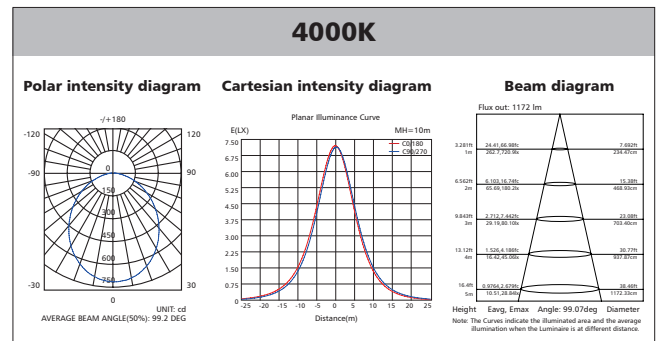

Up to 70% energy saving compared to standard CFL
 Long lifetime of 40,000 hours
 Dimmable when using triac dimmer
 100° wide beam angle CCT: 4000K
 No UV/IR light

Až 70% úspora energie v porovnaní so štandardným CFL
 Dlhá životnosť 40 000 hodín
 Stmievateľné pri použití triakového stmievača
 100 ° široký uhol vyžarovania CCT: 4000K
 Žiadne UV / IR svetlo