

# FHF DB59 LED


LED | Hanging fittings / LED závesné svietidlá



Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Beam angle uhol vyžarovania	Color temperature Farba (K)	Dimensions Rozmery (AxBxC mm)
FHF DB59 A LED IP20	30W	4200	60°	4000	1200x120x40
FHF DB59 B LED IP40	30W	3200	110°	4000	1200x120x40
FHF DB59 C LED IP20	40W	5000	up110°/down 60°	4000	1200x120x40



## Dimensions / Rozmery

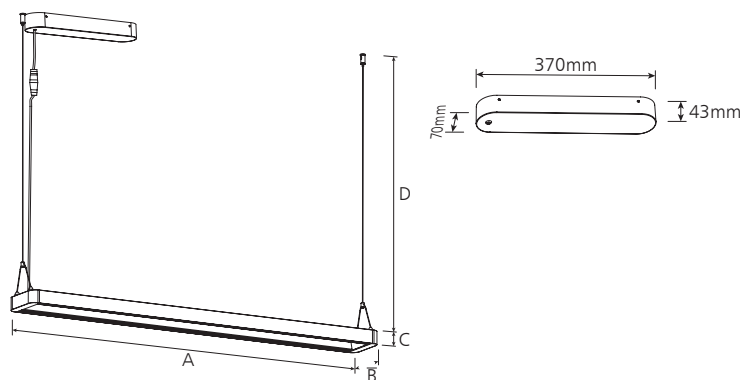

A: Downward surface with grille type (UGR<19)  
B: Downward surface with opal diffusion type  
C: Upward surface with opal diffusion type, Downward surface with grille type (UGR<19)

A: Povrch smerom dole s typom mriežky (UGR <19)  
B: Povrch smerom nadol s opálovým difúznym typom  
C: Povrch smerom nahor s opálovým difúznym typom, povrch smerom dole s typom mriežky (UGR <19)

