


AL 18 LED 180lm/W

LED INDUSTRIAL LIGHT / LED priemyselné svietidlo

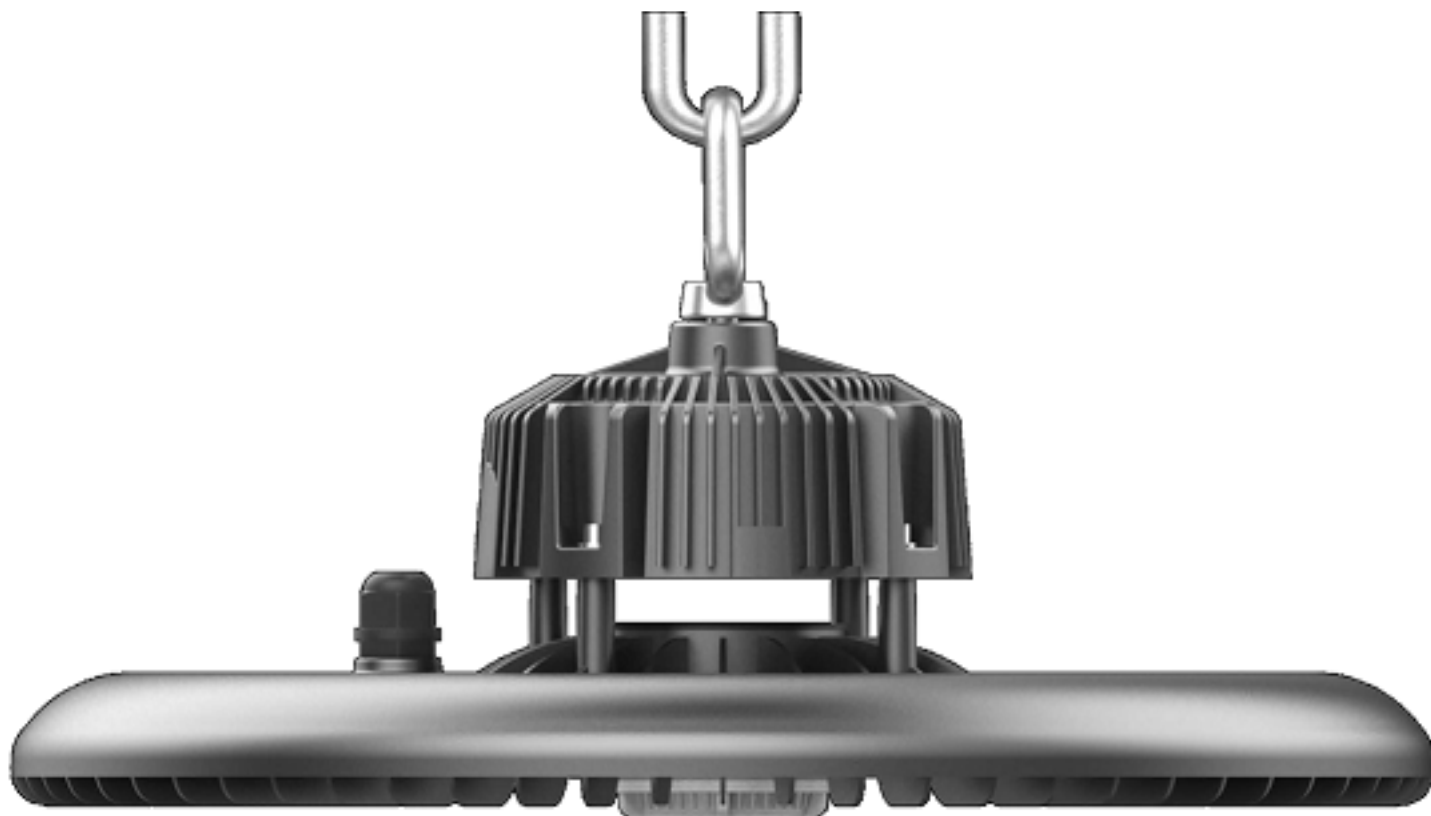

Key Features

- Equiv. to 400W Metal Halide lamps
- IP65 & IK08 double protection
- Superior temperature stability
- Multiple installation ways available
- Multiple light distributions for different project needs
- Compatible with different intelligent control modes
- Emergency mode secured by CBS (Central battery system)

Description

AL 18 is designed with large size but light weight, dia.340mm heat sink helps the body better heat dissipation, and makes sure lifespan. Multiple beam angles available for different installation and contract channel.


Applications

- Warehouse
- Industrial Facility
- Exhibition Center
- Shopping Mall
- Gymnasium
- Airport
- Toll Station and so on.


AL 18 LED 180lm/W

Specifications


Model No.	AL 18 -100	AL 18 150	AL 18-200	AL 18-240
Power Consumption	100±5W	150±7W	200±12W	240±12W
LED Type	Lumileds			
Luminous Flux (4000K, Ra70)	18000(±5%)lm	27000(±5%)lm	36000(±5%)lm	43200(±5%)lm
Correlated Color Temperature	4000K-5000K-6000K available			
Color Rendering Index	Ra80			
Beam Angle	H00116/H00117/H00120/H00122			
Power Supply	SOSEN Driver adjustable			
Input Voltage	100-240VAC			
Power Factor	≥0.92			
Frequency	50 / 60 Hz			
Surge Protection	L-N: 4KV; L/N-GND: 4KV			
Driver Type	Constant Current (CC)			
Product Dimension (mm)	φ251x170mm	φ271 x 178mm	φ291 x 186mm	φ291 x 186mm
Luminaire Net Weight	2.2±0.3kg	2.4±0.3kg	2.6±0.3kg	2.6±0.3kg
Export Carton Size (mm)	271x271x202	291x291x210	301x301x218	301x301x218
Material	Housing	Aluminum Alloy		
	Optics	Polycarbonate Optical Lens		
Finish	Powder Coating			
Fixture Color	Black			
IP Rating	IP65			
Mounting Option	Loop Hanging / Ceiling Mounting			
Operating Temperature	-30°C to + 50°C			
Life Time	>50,000Hrs (Ta=30°C@L80)			
Warranty	5 Years			
Dimmable	Dali			
Accessory	PC Optics Lens - H00116/H00117/H00120/H00122			
	Safety Chain - 250mm chain, M10 + M10 Hook>340mm			
	Plug - EU/US Standard Plug			
	Console - for wall / ceiling			

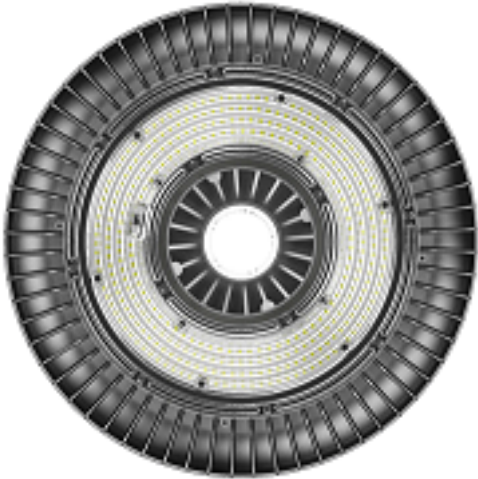


Photometry




120° Wide Angle for
Factory /Gymnasiums
/Athletic Center



90° Medium Angle for
Large Open Areas



60° Narrow Angle for
Highly installed areas
or Narrow Areas



Dome lens



High Bay with PC lens



High Bay with
aluminum reflector




High Bay with prismatic
reflector and drop lens

Accessories

Motion
Sensor



Daylight
Sensor



PC
Reflector



Cable
With Plug



Plug



Steel
Chain



Cable
Connector



3/4"NPT
Converter



Console

