


# BACKLIGHT MICROPRISMA UGR IP 44


LED INSIDE LIGHTS/ LED vstavané svietidlá




| Type / Typ              | Power<br>Výkon<br>(W) | Luminous flux<br>Svetelný tok<br>(lm) | Driver<br>napájac | Color temperature<br>Farba<br>(K) | Dimensions<br>Rozmery<br>(AxBxC mm) |
|-------------------------|-----------------------|---------------------------------------|-------------------|-----------------------------------|-------------------------------------|
| BACKLIGHT MP UGR19 595  | 45W                   | 6750                                  | osram             | 3000/4000                         | 595x595x33                          |
| BACKLIGHT MP UGR19 1195 | 45W                   | 6750                                  | osram             | 3000/4000                         | 1195x295x33                         |

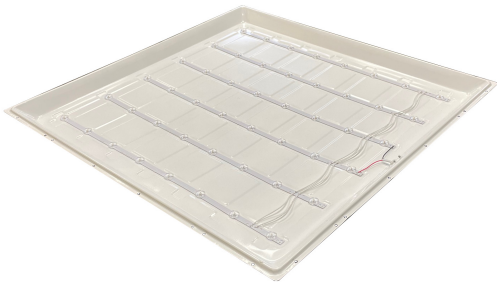

## Dimensions / Rozmery

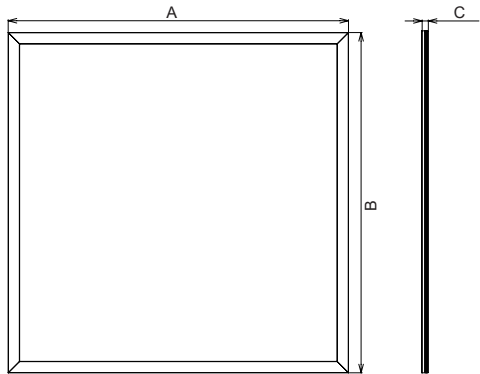


Photometry  
Polar Diagram Comparison

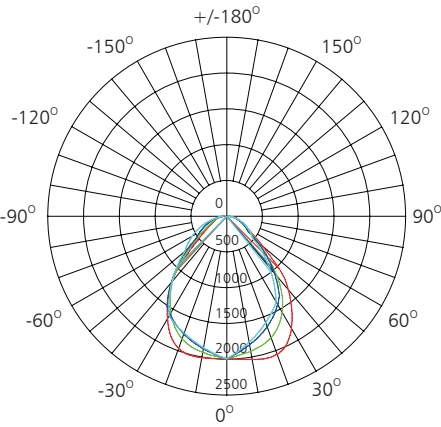

UNIT: cd


- C0/180, 103.8 deg
- C30/210, 101.1 deg
- C60/240, 101.2 deg
- C90/270, 102.1 deg

AVERAGE BEAM ANGLE (50%): 101.3DEG

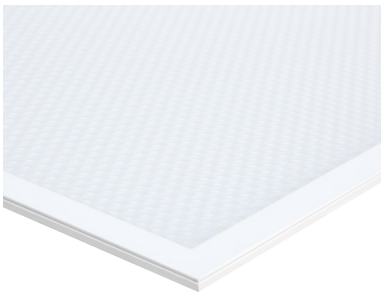


4000K

Polar intensity diagram

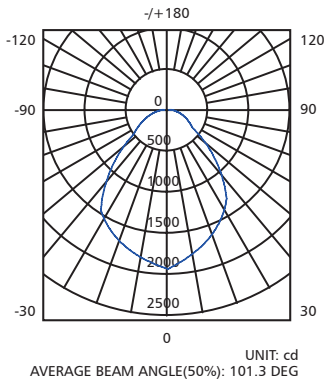


AVERAGE BEAM ANGLE(50%): 101.3 DEG

Cartesian intensity diagram

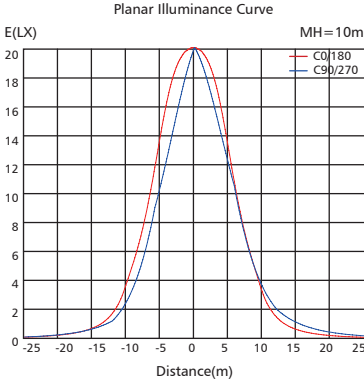

Beam diagram

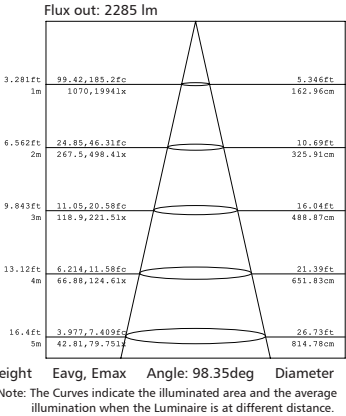

Electronic ballast / Predranik



Osram OT FIT 40 1A0 CS