





Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Color temperature Farba (K)	Dimensions Rozmery (AxB mm)
CL 2008 300 18W + MS	18W	1800	4000	Ø300x40
CL 2008 350 25W	25W	2775	3000	Ø350x40
CL 2008 300 25W	25W	2775	4000	Ø300x40
CL 2008 300 25W + MS	25W	2775	4000	Ø300x40
CL 2008 300 25W + EM	25W	2775	4000	Ø300x40

MS - microwave sensor / mikrovlnný senzor
EM - emergency modul / nudzový modul

Dimensions / Rozmery

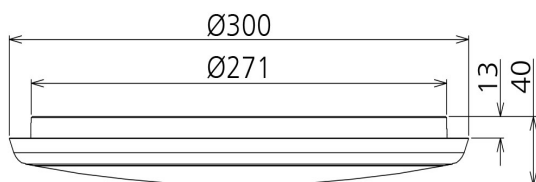


Photometry

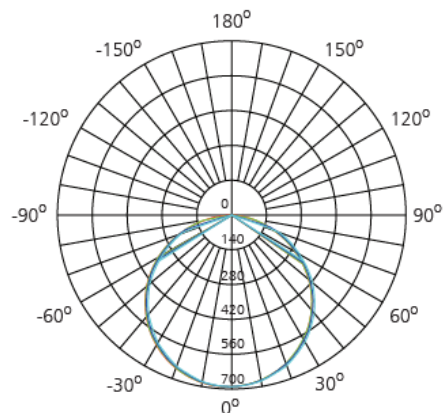

UNIT: cd

- C0/180, 115.2 deg
- C30/210, 115.2 de
- C60/240, 115.2 de
- C90/270, 115.1 de

AVERAGE BEAM ANGLE (50%): 115.2 DEG

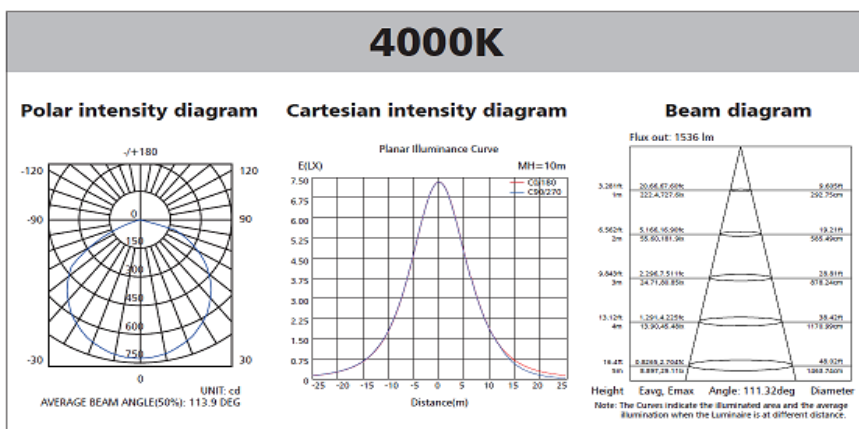

Aluminum components generate a rust-free product for less maintenance
 Opal Acrylic Diffuser
 Up to 70% energy saving compared to standard CFL
 Environment friendly, without Mercury or any other hazardous substances

Hliníkové komponenty vytvárajú produkt bez hrdze pre menšiu údržbu
 Opálový akrylový difuzér
 Až 70% úspora energie v porovnaní so štandardným CFL
 Priaznivá pre životné prostredie, bez ortuti alebo iných nebezpečných látok