


CL 2038 SQR 300 IP40 LED


LED INDUSTRIAL FLUORESCENT LIGHT FITTING / LED Priemyselné svietidlá

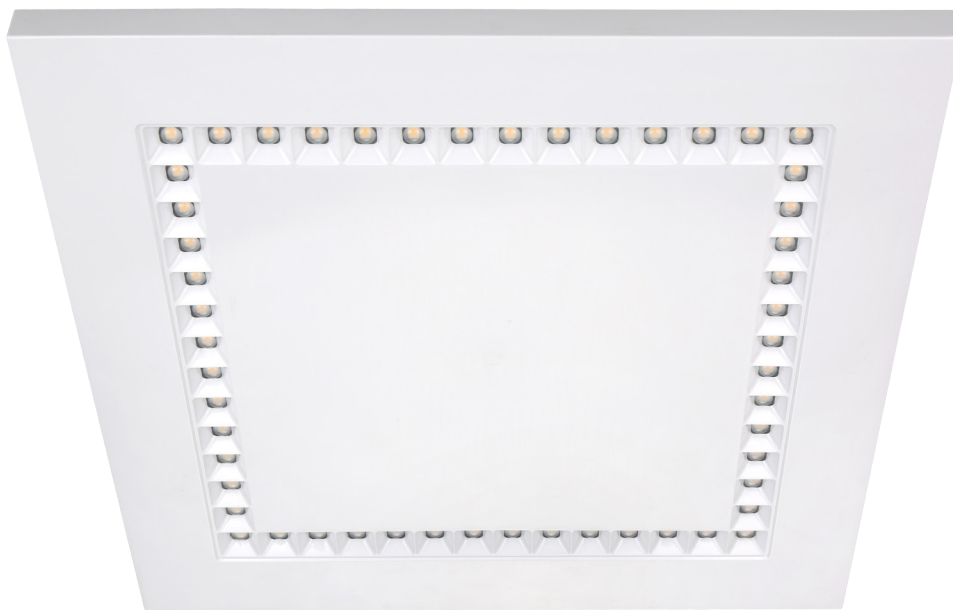


Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Color temperature Farba (K)	Dimensions Rozmery (AxBxC mm)
CL 2038 LED	15W	1890	3000/4000	300x300x33
Váha 0,88 Kg				

*Teplota okolia : 25°C tolerancia výkonu +/- 5%
** Lumen tolerancia : +/- 7%

Dimensions / Rozmery

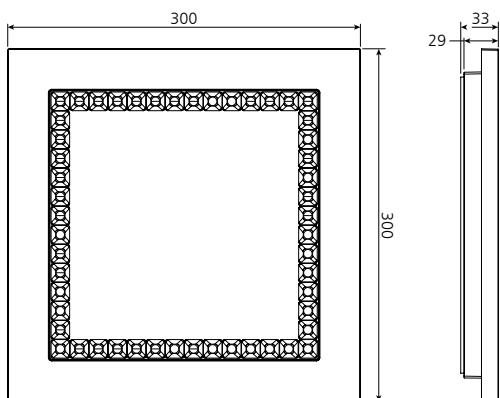


Photometry

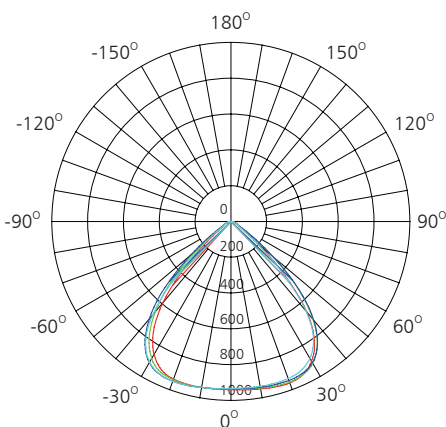

UNIT: cd

- C0/180, 86.5 deg
- C30/210, 91.2 deg
- C60/240, 92.5 deg
- C90/270, 87.9 deg

AVERAGE BEAM ANGLE (50%): 89.5DEG

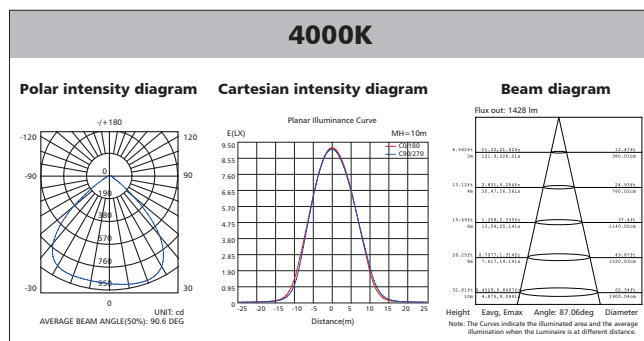

Up to 70% energy saving compared to standard CFL

Long lifetime of 50,000 hours

100° wide beam angle CCT: 4000K

No UV/IR light

IP40 for indoor use

Až 70% úspora energie v porovnaní so štandardným CFL

Dlhá životnosť 50 000 hodín

100 ° široký uhol vyžarovania CCT: 4000K

Žiadne UV/IR svetlo

IP40 pre vnútorné použitie