

DL 400C / 600C / 800C


LED Downlight lights IP44




Specifications / Špecifikácia

Model		DL 400 C	DL 600 C	DL 800 C
Power / Výkon		18W	20 W	30 W
Luminous Flux/Svetelný tok		2160LM	2600LM	3900LM
Color temperature / farba		3000K / 4000K		
Electrical class / el. tried		II		
UGR		--		
Color Rendering Index (CRI)		Ra 80		
Beam angle Uhol vyžarovania		60°		
Input Voltage Napájanie		200-240VAC		
Power Factor		>0.90		
Frequency		50 / 60 Hz		
Operating Temperature Pracovná teplota		70°C		
Driver Type / Typ napájača		Constant Current (CC)		
Product Dimension (mm) Rozmer svietidla (mm)		AxBxC Ø145×70xØ125	AxBxC Ø190×80xØ170	AxBxC Ø224×90xØ200
Luminaire Net Weight Hmotnosť svietidla		0.6kg	0.75kg	0.90kg
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina		
	Diffuser / difuzor	PMMA / Polymetylmetakrylát		
Fixture Color / Farba svietidla		White / Biela		
IP Rating / Krytie IP		IP44		
Life Time / životnosť		>50,000H (Ta=30°L80B10)		
Warranty / záruka		5 Years/rokov		

Dimensions / Rozmery

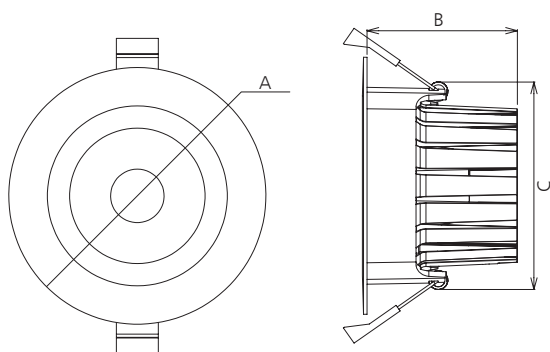

Photometry

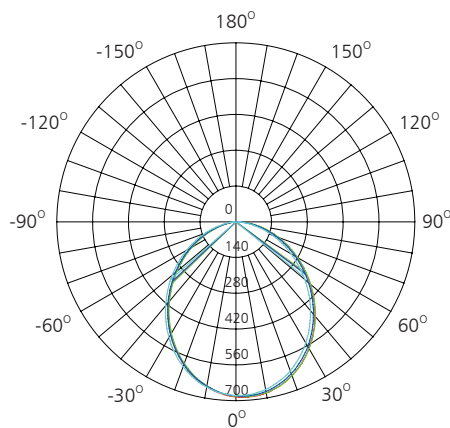

UNIT: cd

- C0/180, 99.9 deg
- C30/210, 99.9 deg
- C60/240, 99.9 deg
- C90/270, 99.9 deg

AVERAGE BEAM ANGLE (50%): 99.9DEG