



DL 292T



DL 492T




DL 692T




DL 892T

### Dimensions / Rozmery

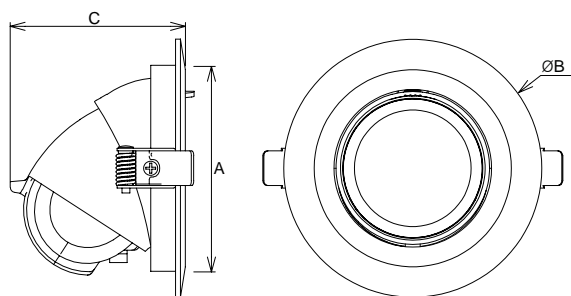

### Photometry

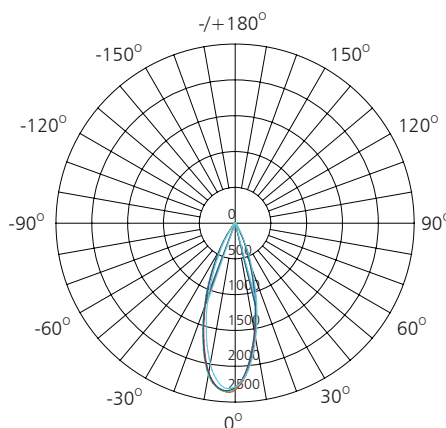

UNIT: cd

- C0/180, 34.7 deg
- C30/210, 34.8 deg
- C60/240, 34.8 deg
- C90/270, 34.6 deg

AVERAGE BEAM ANGLE (50%): 34.7DEG

### Specifications / Špecifikácia

Model	DL 292T	DL 492T	DL 492T	DL 692T	DL 892T
Power / Výkon	10 W	15 W	20 W	35 W	45 W
Luminous Flux/Svetelný tok	1000LM	1500LM	2000LM	3890LM	5000LM
Color temperature / farba	3000K/4000K				
Electrical class / el. tried	II				
UGR	19				
Color Rendering Index (CRI)	Ra 90				
Montážny otvor (mm)	85 mm	95 mm	95 mm	165 mm	200 mm
Input Voltage Napájanie	200-240VAC				
Power Factor	>0.90				
Frequency	50 / 60 Hz				
Driver Type / Typ napájača	Constant Current (CC)				
Product Dimension (mm) Rozmer svietidla (mm) A x B x C	Ø96x85	Ø 110x100	Ø 180x135	Ø 110x100	
Material	Housing / teleso	Aluminium alloy / hliníková zliatina			
	Diffuser / difuzor	Clear glass / číre sklo			
Fixture Color / Farba svietidla	White / Biela				
IP Rating / Krytie IP	IP40				
Life Time / životnosť	>30,000H				
Warranty / záruka	2 Years/2 roky				