


FHF R XT70 LED


LED Hanging fittings / LED Závesné svetidlo

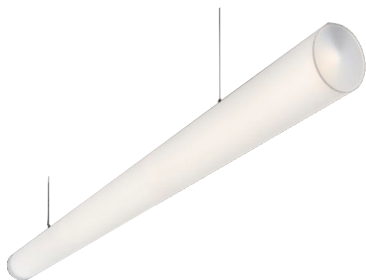


Specifications / Špecifikácia

Model	FHF R XT70	FHF R XT70	FHF R XT70	FHF R XT70
Power / Výkon	35 W	42 W	50 W	59,5 W
Luminous Flux/Svetelný tok	4844 LM	6055 LM	7266 LM	8477 LM
Color temperature / farba	3000K/4000K			
Electrical class / el. tried	I			
UGR	--			
Color Rendering Index (CRI)	Ra 80			
Beam angle Uhol vyžarovania	140 °			
Input Voltage Napájanie	200-240VAC			
Power Factor	>0.90			
Frequency	50 / 60 Hz			
Operating Temperature Pracovná teplota	45°C			
Driver Type / Typ napájača	Constant Current (CC)			
Product Dimension (mm) Rozmer svetidla (mm)	A x B ø70 x 1140	A x B ø70 x 1420	A x B ø70 x 1700	A x B ø70 x 1980
Luminaire Net Weight Hmotnosť svetidla	1.7kg	1.9kg	2.3kg	2.7kg
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina		
	Diffuser / difuzor	PMMA / Polymetylmetakrylát		
Fixture Color / Farba svetidla	White / Biela			
IP Rating / Krytie IP	IP20			
Life Time / životnosť	>50,000H (Ta=30°L80B10)			
Warranty / záruka	5 Years/rokov			
Hanging system Závesný systém	1.5m rope/lano			

Dimensions / Rozmery



Photometry

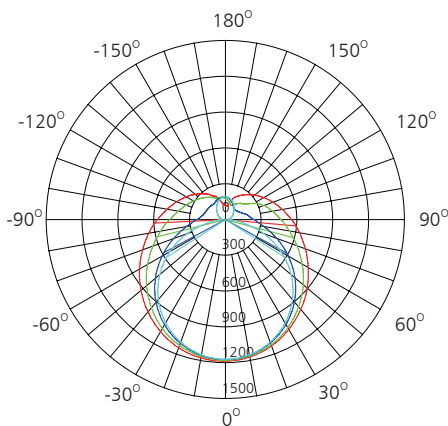

UNIT: cd

- C0/180, 172.0 deg
- C30/210, 150.8 deg
- C60/240, 123.1 deg
- C90/270, 115.0 deg

AVERAGE BEAM ANGLE (50%): 140.2DEG