



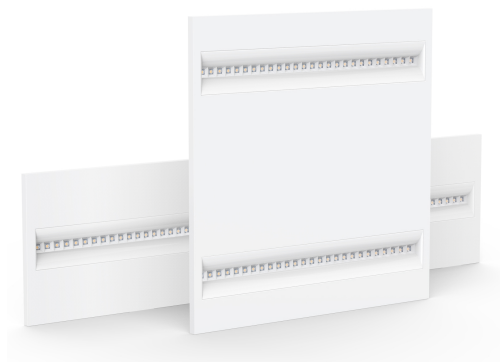


Specifications / Špecifikácia

Model	PLA 6060	PLA 30120
Power / Výkon	35 W	35 W
Luminous Flux/Svetelný tok	3955 LM	3955 LM
Color temperature / farba	4000K	
Electrical class / el. tried	II	
UGR	19	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	90°	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.90	
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	45°C	
Driver Type / Typ napájača	Constant Current (CC)	
Product Dimension (mm) Rozmer svietidla (mm)	A x B x C 595x595x28	A x B x C 1195x295x28
Luminaire Net Weight Hmotnosť svietidla	3.2kg	3.6kg
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela	
IP Rating / Krytie IP	IP40	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/rokov	

Dimensions / Rozmery

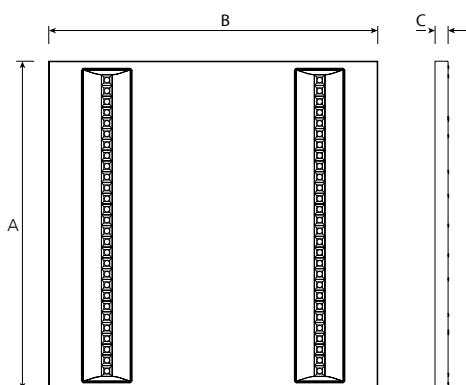

Photometry

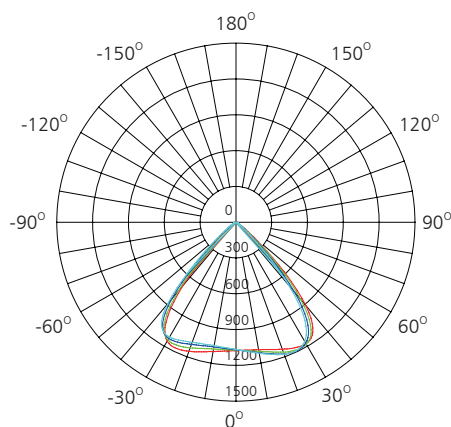

UNIT: cd

- C0/180, 85.3 deg
- C30/210, 85.2 deg
- C60/240, 85.0 deg
- C90/270, 84.8 deg

AVERAGE BEAM ANGLE (50%): 85.1DEG