

DL 300 UGR19


LED Downlight lights IP44




Specifications / Špecifikácia

Model	DL 300 UGR19	
Power / Výkon	15W	
Luminous Flux/Svetelný tok	1800lm	
Color temperature / farba	3000K / 4000K	
Electrical class / el. tried	II	
UGR	19	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	36°	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.90	
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	45°C	
Driver Type / Typ napájača	Constant Current (CC)	
Product Dimension (mm) Rozmer svietidla (mm)	AxBxC Ø110x80xØ90	
Luminaire Net Weight Hmotnosť svietidla	0.75kg	
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela	
IP Rating / Krytie IP	IP44	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/5 rokov	

Dimensions / Rozmery

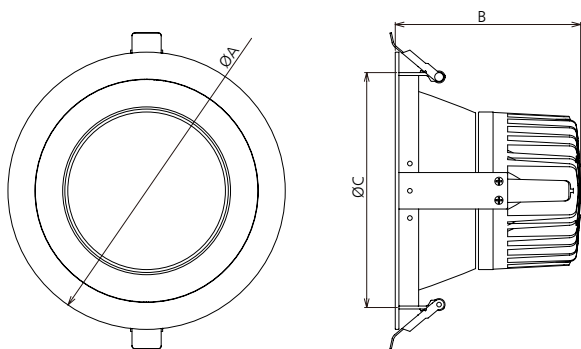

Photometry

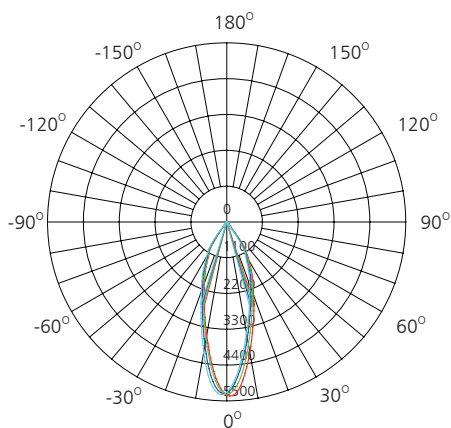

UNIT: cd

- C0/180, 33.4 deg
- C30/210, 33.1 deg
- C60/240, 33.0 deg
- C90/270, 32.9 deg

AVERAGE BEAM ANGLE (50%): 33.1DEG