



Specifications / Špecifikácia

Model	DL 5100	
Power / Výkon	18W	
Luminous Flux/Svetelný tok	1692LM	
Color temperature / farba	4000K	
Electrical class / el. tried	II	
UGR	19	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	100°	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.90	>0.93
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	70°C	
Driver Type / Typ napájača	Constant Current (CC)	
Product Dimension (mm) Rozmer svietidla (mm)	170×170×59	
Luminaire Net Weight Hmotnosť svietidla	0.8kg	
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela	
IP Rating / Krytie IP	IP54	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/rokov	

Dimensions / Rozmery

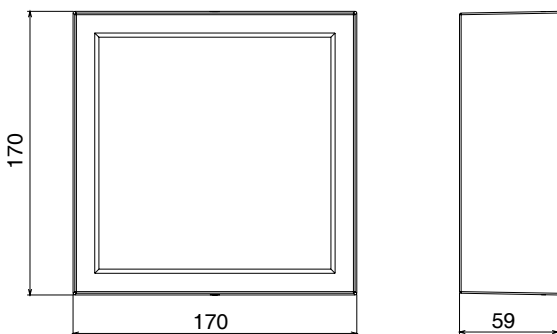

Photometry

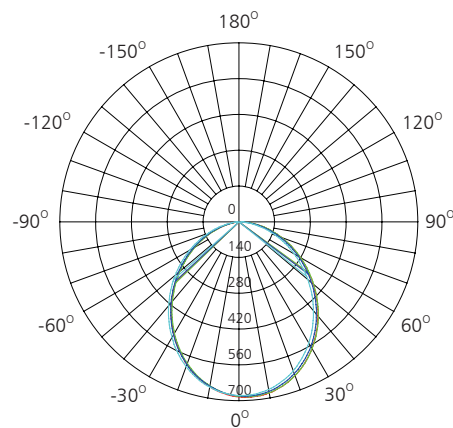

UNIT: cd

- C0/180, 99.9 deg
- C30/210, 99.9 deg
- C60/240, 99.9deg
- C90/270, 99.9 deg

AVERAGE BEAM ANGLE (50%): 99.9DEG