

# BACKLIGHT GRID MULTI CCT


## LED INSIDE LIGHTS / LED VSTAVÁNÉ SVIETIDLA




### Specifications / Špecifikácia

<b>Model</b>	BACKLIGHT 1195
<b>Power / Výkon</b>	40 W
<b>Luminous Flux/Svetelný tok</b>	5000 lm
<b>Color temperature / farba</b>	3000K / 4000K CCT
<b>Electrical class / el. tried</b>	II
<b>UGR</b>	16
<b>Color Rendering Index (CRI)</b>	Ra 90
<b>Beam angle Uhol vyžarovania</b>	90°
<b>Input Voltage Napájanie</b>	200-240VAC
<b>Power Factor</b>	>0.90
<b>Frequency</b>	50 / 60 Hz
<b>Operating Temperature Pracovná teplota</b>	45°C
<b>Driver Type / Typ napájača</b>	Constant Current (CC) , FIX driver
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	A x B x C 1195x295x33
<b>Luminaire Net Weight Hmotnosť svietidla</b>	1.9kg
<b>Material</b>	<b>Housing / teleso</b> Aluminum Alloy / hliníková zliatina
	<b>Diffuser / difuzor</b> PMMA / Polymetylmetakrylát
	Surface mounted kit 300x1200x63mm
<b>Fixture Color / Farba svietidla</b>	White / Biela
<b>IP Rating / Krytie IP</b>	IP20
<b>Life Time / životnosť</b>	>50,000H (Ta=30°L80B10)
<b>Warranty / záruka</b>	5 Years/rokov

### Dimensions / Rozmery

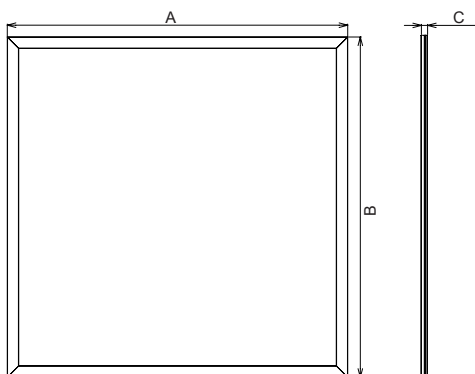

### Photometry

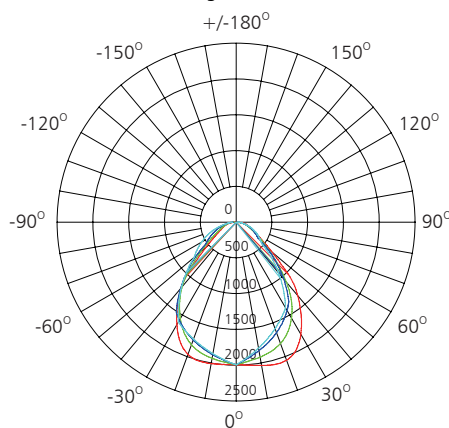

**UNIT: cd**

- C0/180, 103.8 deg
- C30/210, 101.1 deg
- C60/240, 101.2 deg
- C90/270, 102.1 deg

AVERAGE BEAM ANGLE (50%): 101.3DEG