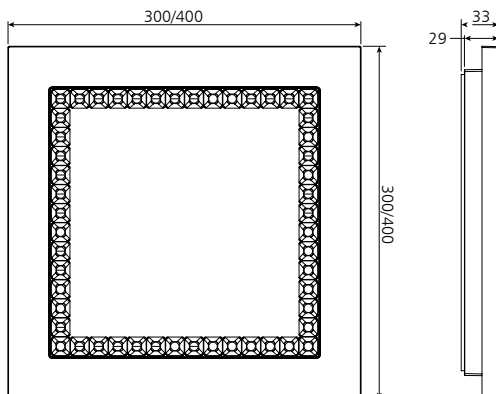
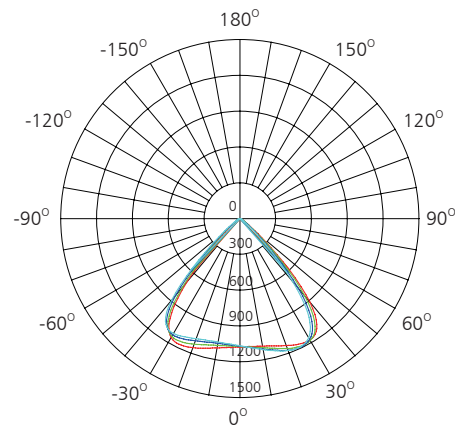

**Specifications / Špecifikácia**

<b>Model</b>	CL 2038 SQR 300
<b>Power / Výkon</b>	15 W
<b>Luminous Flux/Svetelný tok</b>	1890 lm
<b>Color temperature / farba</b>	3000/4000K
<b>Electrical class / el. tried</b>	II
<b>UGR</b>	--
<b>Color Rendering Index (CRI)</b>	Ra 80
<b>Beam angle Uhol vyžarovania</b>	100 °
<b>Input Voltage Napájanie</b>	200-240VAC
<b>Power Factor</b>	>0.90
<b>Frequency</b>	50 / 60 Hz
<b>Operating Temperature Pracovná teplota</b>	70°C
<b>Driver Type / Typ napájača</b>	Constant Current (CC), FIX driver
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	300x300x33
<b>Luminaire Net Weight Hmotnosť svietidla</b>	0.88kg
<b>Material</b>	<b>Housing / teleso</b> Plastic housing / plastové teleso
	<b>Diffuser / difuzor</b> PMMA / Polymetylmetakrylát
<b>Fixture Color / Farba svietidla</b>	White / Biela
<b>IP Rating / Krytie IP</b>	IP40
<b>Life Time / životnosť</b>	>50,000H (Ta=30°L80B10)
<b>Warranty / záruka</b>	5 Years/rokov

**Dimensions / Rozmery**

**Photometry**


AVERAGE BEAM ANGLE (50%): 85.1DEG

**UNIT: cd**

- C0/180, 85.3 deg
- C30/210, 85.2 deg
- C60/240, 85.0 deg
- C90/270, 84.8 deg