


CL 2008 LED IP54

LED INDUSTRIAL FLUORESCENT LIGHT FITTING / LED Priemyselné svietidlá




Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Color temperature Farba (K)	Dimensions Rozmery (AxB mm)
CL 2008 LED 12W	12W	1016	4000	Ø250x33
CL 2008 LED 25W	25W	1950	3000	Ø350x33
CL 2008 LED 18W + senzor	18W	1440	4000	Ø300x33

Dimensions / Rozmery

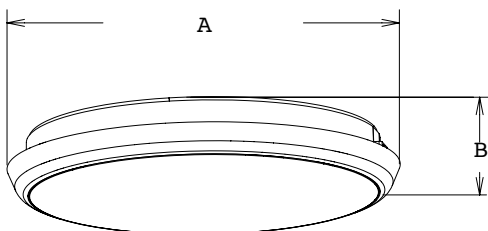


Photometry

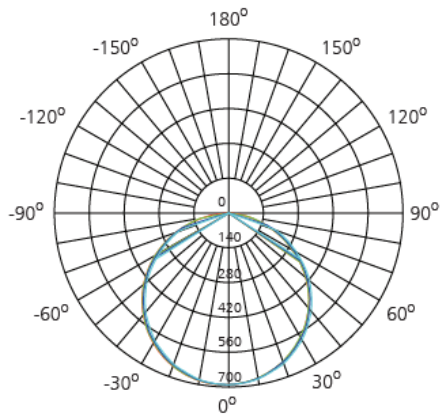

AVERAGE BEAM ANGLE (50%): 115.2 DEG

UNIT: cd

- C0/180, 115.2 deg
- C30/210, 115.2 de
- C60/240, 115.2 de
- C90/270, 115.1 de

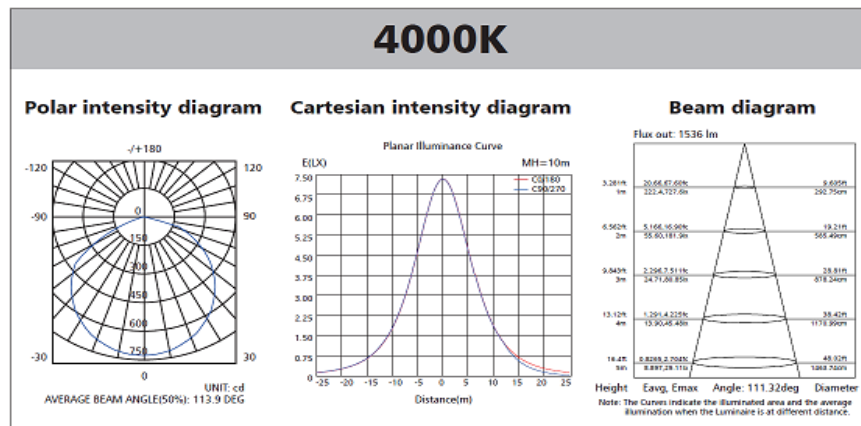

Aluminum components generate a rust-free product for less maintenance
 Opal Acrylic Diffuser
 Up to 70% energy saving compared to standard CFL
 Environment friendly, without Mercury or any other hazardous substances

Hliníkové komponenty vytvárajú produkt bez hrdze pre menšiu údržbu
 Opálový akrylový difúzer
 Až 70% úspora energie v porovnaní so štandardným CFL
 Priaznivá pre životné prostredie, bez ortuti alebo iných nebezpečných látok