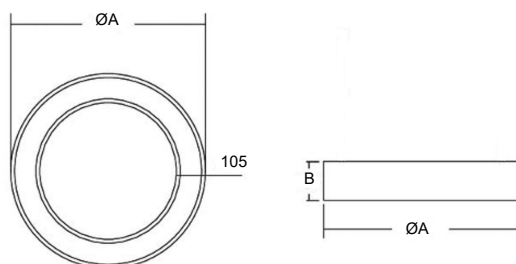

Specifications / Špecifikácia

Model	FHF DONUT 500	FHF DONUT 600	FHF DONUT 800
Power / Výkon	30 W	36 W	42 W
Luminous Flux/Svetelný tok	2400 lm	2880 lm	3360 lm
Color temperature / farba	3000K/4000K /6500 CCT		
Electrical class / el. tried	II		
UGR	--		
Color Rendering Index (CRI)	Ra 80		
Beam angle Uhol vyžarovania	120°		
Input Voltage Napájanie	200-240VAC		
Power Factor	>0.90		
Frequency	50 / 60 Hz		
Operating Temperature Pracovná teplota	45°C		
Driver Type / Typ napájača	Triac dimmer (HGP)		
Product Dimension (mm) Rozmer svietidla (mm)	A x B Ø500x80	A x B Ø600x80	A x B Ø800x80
Luminaire Net Weight Hmotnosť svietidla	1.15kg	1.45kg	1.85kg
Material	Housing / teleso	Sheet / plech	
	Diffuser / difuzor	PMMA / Polymetylmetakrylát OPAL	
Accessories / Príslušenstvo	hanging system / závesný systém 1,3 m		
Fixture Color / Farba svietidla	White / Biela		
IP Rating / Krytie IP	IP40		
Life Time / životnosť	>50,000H (Ta=30°L80B10)		
Warranty / záruka	5 Years/rokov		

Dimensions / Rozmery

Photometry