

# IP65 F7 GRP + PMMA OPAL

LED Waterproof lights IP65 / LED Prachotesné svietidla IP65



Protection grid / Ochranná mriežka




## Specifications / Špecifikácia

<b>Model</b>	F7 218 600	F7 236 1200	F7 258 1500
<b>Power / Výkon</b>	29W	60 W	72W
<b>Luminous Flux/Svetelný tok</b>	4400 lm	8800 lm	11000 lm
<b>Color temperature / farba</b>	4000K		
<b>Electrical class / el. tried</b>	I		
<b>UGR</b>	--		
<b>Color Rendering Index (CRI)</b>	Ra 80		
<b>Beam angle Uhol vyžarovania</b>	120 °		
<b>Input Voltage Napájanie</b>	200-240VAC		
<b>Power Factor</b>	>0.90		
<b>Frequency</b>	50 / 60 Hz		
<b>Operating Temperature Pracovná teplota</b>	-20 °C / +35 °C		
<b>Driver Type / Typ napájača</b>	CC (Constant current) , FIX driver *		
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	A x B 669x460	A x B 1277x800	A x B 1577x1100
<b>Luminaire Net Weight Hmotnosť svietidla</b>	1.1kg	2.4kg	2.7kg
<b>Material</b>	<b>Housing / teleso</b>	GRP / Polyester vystužený sklenenými vláknami	
	<b>Diffuser / difuzor</b>	PMMA / Polymetylmetakrylát	
<b>Fixture Color / Farba svietidla</b>	White / Biela		
<b>IP Rating / Krytie IP</b>	IP65		
<b>Life Time / životnosť</b>	>50,000H (Ta=30°L80B10)		
<b>Warranty / záruka</b>	5 Years/rokov		

\* Available with a dimmable DALI driver on demand.  
\* Available with emergency module or motion sensor on demand.

## Dimensions / Rozmery

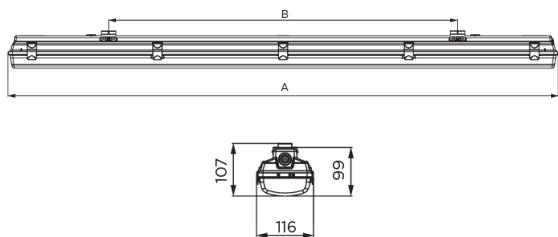

## Photometry

