

RF ROUND CCT 300,400 LED

LED Hanging fittings / LED Závašné svietidlo



Specifications / Špecifikácia


Model	RF ROUND 300	RF ROUND 400
Power / Výkon	24 W	30 W
Luminous Flux/Svetelný tok	1656 lm	2070 lm
Color temperature / farba	3000K/4000K CCT	
Electrical class / el. tried	I	
UGR	--	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	120 °	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.90	
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	45°C	
Driver Type / Typ napájača	Constant Current (CC) , FIX driver *	
Product Dimension (mm) Rozmer svietidla (mm)	A x B Ø300 x 100	A x B Ø400 x 100
Luminaire Net Weight Hmotnosť svietidla	1.25kg	1.52kg
Material	Housing / teleso	Sheet / plech
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
		Opal
Fixture Color / Farba svietidla	White / Biela , Black / Čierna *	
IP Rating / Krytie IP	IP40	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/rokov	
Hanging system Závašný systém	1.5m rope/lano	

*Available with OSRAM/TRIDONIC Driver and led modules on demand.


*Available with a dimmable DALI driver, TRIAC dimmer HGP, BT controller on demand.

*Lighting fixture is available in any RAL scale color on demand.

Dimensions / Rozmery

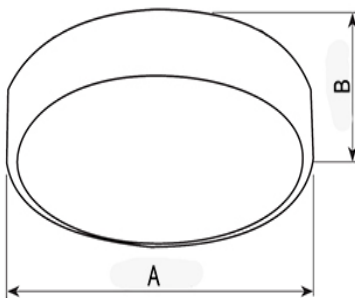

Photometry

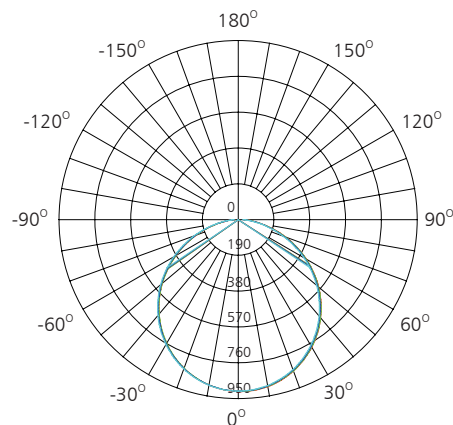

UNIT: cd

- C0/180, 112.3 deg
- C30/210, 112.3 deg
- C60/240, 112.4 deg
- C90/270, 112.3 deg

AVERAGE BEAM ANGLE (50%): 112.3 DEG