

# RF ROUND CCT 800 LED

LED Hanging fittings / LED Závesné svietidlo



## Specifications / Špecifikácia


<b>Model</b>	RF ROUND 800
<b>Power / Výkon</b>	90 W
<b>Luminous Flux/Svetelný tok</b>	8100 lm
<b>Color temperature / farba</b>	3000K/4000K CCT
<b>Electrical class / el. tried</b>	I
<b>UGR</b>	--
<b>Color Rendering Index (CRI)</b>	Ra 80
<b>Beam angle Uhol vyžarovania</b>	120 °
<b>Input Voltage Napájanie</b>	200-240VAC
<b>Power Factor</b>	>0.90
<b>Frequency</b>	50 / 60 Hz
<b>Operating Temperature Pracovná teplota</b>	45°C
<b>Driver Type / Typ napájača</b>	Constant Current (CC) , FIX driver *
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	A x B Ø800 x 100
<b>Luminaire Net Weight Hmotnosť svietidla</b>	6,2 kg
<b>Material</b>	<b>Housing / teleso</b> Sheet / plech
	<b>Diffuser / difuzor</b> PMMA / Polymetylmetakrylát
	Opal
<b>Fixture Color / Farba svietidla</b>	White / Biela , Black / Čierna *
<b>IP Rating / Krytie IP</b>	IP40
<b>Life Time / životnosť</b>	>50,000H (Ta=30°L80B10)
<b>Warranty / záruka</b>	5 Years/rokov
<b>Hanging system Závesný systém</b>	1.5m rope/lano

\*Available with OSRAM/TRIDONIC Driver and led modules on demand.


\*Available with a dimmable DALI driver, TRIAC dimmer HGP, BT controller on demand.

\*Lighting fixture is available in any RAL scale color on demand.

## Dimensions / Rozmery

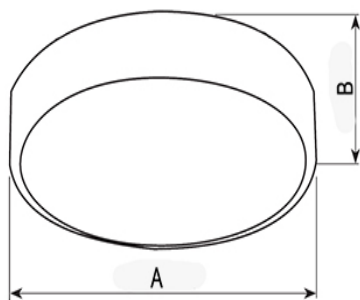

## Photometry

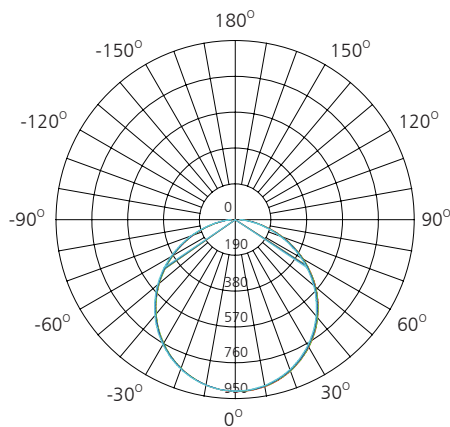

**UNIT: cd**

- C0/180, 112.3 deg
- C30/210, 112.3 deg
- C60/240, 112.4 deg
- C90/270, 112.3 deg

AVERAGE BEAM ANGLE (50%): 112.3 DEG