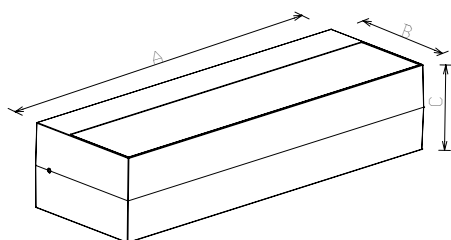

Specifications / Špecifikácia

Model	WL 88-10	WL 88-15
Power / Výkon	10 W	15 W
Luminous Flux/Svetelný tok	750 lm	1150 lm
Color temperature / farba	3000K / 4000K	
Electrical class / el. tried	I	
UGR	--	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	60°x 115°x 60°	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.50	
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	-20°C - 45°C	
Driver Type / Typ napájača	Triac	
Product Dimension (mm) Rozmer svietidla (mm)	A x B x C 200x100x60	A x B x C 300x100x60
Luminaire Net Weight Hmotnosť svietidla	0.71kg	1.3kg
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	Black / Čierna	
IP Rating / Krytie IP	IP65	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/rokov	

Dimensions / Rozmery

Photometry
