

STAR GLASS UNI CB


LED Emergency light IP65 / LED Núdzové svietidlo IP65



Specifications / Špecifikácia

Model	STAR GLASS UNI CB
Power / Výkon	3,5 W
Luminous Flux/Svetelný tok	75 LM
Color temperature / farba	5000K
Electrical class / el. tried	II
UGR	--
Color Rendering Index (CRI)	Ra 80
Visibility Viditeľnosť	25 m
Input Voltage Napájanie	200-240VAC
Power Factor	>0.92
Frequency	0 / 50 Hz
Operating Temperature Pracovná teplota	0°C to +40 °C
Mode / Režim	CB /CBAM
Product Dimension (mm) Rozmer svietidla (mm)	A x B x C 315 x 45 x 220
Luminaire Net Weight Hmotnosť svietidla	0,85 kg
Material	Housing / teleso PMMA / Polymetylmetakrylát
	Diffuser / difuzor PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela RAL
IK Rating / Krytie IK	IK05
IP Rating / Krytie IP	IP65
Life Time / životnosť	>50,000H (Ta=30°L80B10)
Warranty / záruka	5 Years/rokov

Dimensions / Rozmery

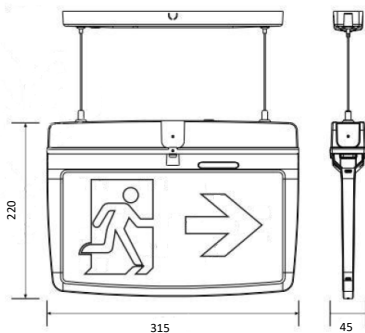

Instalation / Inštalácia

