

STAR P ANTIPANIC CB


LED Emergency light IP65 / LED Núdzové svietidlo IP65



Specifications / Špecifikácia

| | | |
|---|---------------------------------|----------------------------|
| Model | STAR P ANTIPANIC LED CORIDOR CB | |
| Power / Výkon | 3 W | |
| Luminous Flux/Svetelný tok | 165 lm | |
| Color temperature / farba | 6000K | |
| Electrical class / el. tried | II | |
| UGR | -- | |
| Color Rendering Index (CRI) | Ra 70 | |
| Beam angle Uhol vyžarovania | coridor optic | |
| Input Voltage Napájanie | 200-240VAC | |
| Power Factor | >0.92 | |
| Frequency | 50 / 60 Hz | |
| Operating Temperature Pracovná teplota | 0°C to +40 °C | |
| Mode / Režim | CB / CBAM | |
| Product Dimension (mm) Rozmer svietidla (mm) | A x B x C ø170x70xø150 | |
| Luminaire Net Weight Hmotnosť svietidla | 0.75kg | |
| Material | Housing / teleso | PMMA / Polymetylmetakrylát |
| | Diffuser / difuzor | PMMA / Polymetylmetakrylát |
| Fixture Color / Farba svietidla | White / Biela RAL | |
| IK Rating / Krytie IK | IK05 | |
| IP Rating / Krytie IP | IP65 | |
| Life Time / životnosť | >50,000H (Ta=30°L80B10) | |
| Warranty / záruka | 5 Years/rokov | |

Dimensions / Rozmery

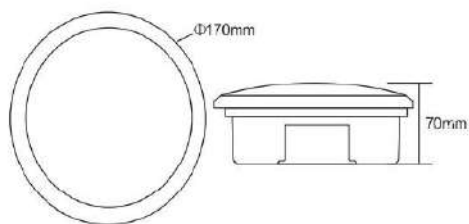

Accessories / Doplnky

