


# HFL R XT70 LED


LED Hanging fittings / LED Závesné svetidlo

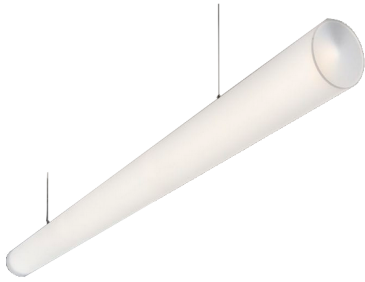


## Specifications / Špecifikácia

<b>Model</b>	HFL R XT70	HFL R XT70	HFL R XT70	HFL R XT70
<b>Power / Výkon</b>	35 W	42 W	50 W	59,5 W
<b>Luminous Flux/Svetelný tok</b>	4844 LM	6055 LM	7266 LM	8477 LM
<b>Color temperature / farba</b>	3000K/4000K			
<b>Electrical class / el. tried</b>	I			
<b>UGR</b>	--			
<b>Color Rendering Index (CRI)</b>	Ra 80			
<b>Beam angle Uhol vyžarovania</b>	140 °			
<b>Input Voltage Napájanie</b>	200-240VAC			
<b>Power Factor</b>	>0.90			
<b>Frequency</b>	50 / 60 Hz			
<b>Operating Temperature Pracovná teplota</b>	45°C			
<b>Driver Type / Typ napájača</b>	Constant Current (CC)			
<b>Product Dimension (mm) Rozmer svetidla (mm)</b>	A x B Ø70 x 1140	A x B Ø70 x 1420	A x B Ø70 x 1700	A x B Ø70 x 1980
<b>Luminaire Net Weight Hmotnosť svetidla</b>	1.7kg	1.9kg	2.3kg	2.7kg
<b>Material</b>	<b>Housing / teleso</b>	Aluminum Alloy / hliníková zliatina		
	<b>Diffuser / difuzor</b>	PMMA / Polymetylmetakrylát		
<b>Fixture Color / Farba svetidla</b>	White / Biela			
<b>IP Rating / Krytie IP</b>	IP20			
<b>Life Time / životnosť</b>	>50,000H (Ta=30°L80B10)			
<b>Warranty / záruka</b>	5 Years/rokov			
<b>Hanging system Závesný systém</b>	1.5m rope/lano			

## Dimensions / Rozmery



## Photometry

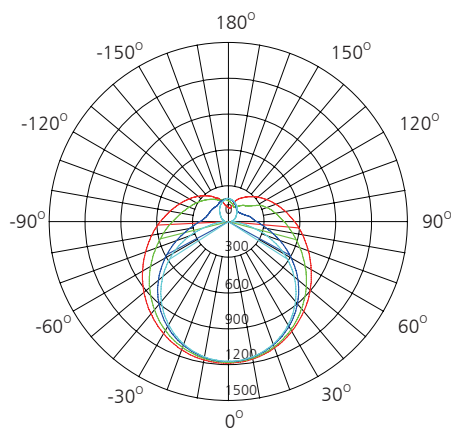

**UNIT: cd**

- C0/180, 172.0 deg
- C30/210, 150.8 deg
- C60/240, 123.1 deg
- C90/270, 115.0 deg

AVERAGE BEAM ANGLE (50%): 140.2DEG