

OBD 150 SO AT



LED Emergency light IP44 / LED Núdzové svietidlo IP44



Specifications / Špecifikácia

Model	OBD 150 SO AT 3 hod NM
Power / Výkon	3,5 W
Luminous Flux/Svetelný tok	190 lm
Color temperature / farba	5000K
Electrical class / el. tried	II
UGR	--
Color Rendering Index (CRI)	Ra 80
Beam angle Uhol vyžarovania	Open spaces
Input Voltage Napájanie	200-240VAC
Power Factor	>0.92
Frequency	50 / 60 Hz
Operating Temperature Pracovná teplota	0°C to +40 °C
Battery / Bateria	LiFePO4 6,4V 3000mAh
Product Dimension (mm) Rozmer svietidla (mm)	A x B x C 269 x 144 x 42
Luminaire Net Weight Hmotnosť svietidla	1.25kg
Material	Housing / teleso PMMA / Polymetylmetakrylát
	Diffuser / difuzor PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela RAL
IK Rating / Krytie IK	IK05
IP Rating / Krytie IP	IP44
Life Time / životnosť	>50,000H (Ta=30°L80B10)
Warranty / záruka	5 Years/rokov

Dimensions / Rozmery

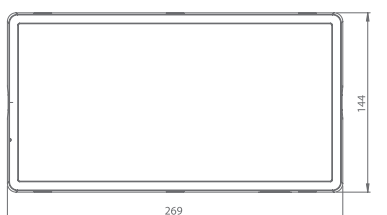

Photometry

